

Hanwell Pro

Sensor Options

The **Hanwell Pro** Sensor options technical data sheet details all the sensors available to use with the Hanwell Pro Series products.

Please select your product first from the relevant Hanwell Pro product datasheets, then add your required sensor appropriately as below. *Please note that sensor temperature ranges may be restricted by the instrument it is used with. Please check the relevant instrument data sheet.*

Note - This datasheet covers our standard and readily available cable lengths. Other lengths may be available than those listed. Please contact Hanwell Solutions with your requirements.



Temperature



Humidity



Carbon Dioxide



Flood



Airflow



Manufactured by Hanwell | Ellab   RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com



ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)

mail : sales@isi-be.eu web : www.isi-be.eu

		Probe Family																		
Product family	Unit Type	Thermistor				PT100		PT1000	Thermocouple		Door	Flood*	RH/T		CO ₂		Y060**	Airflow		
		Y300	J095	J254	Y306	J094	J237	J182	J043	J044	Door	V053	J140/ J223	J115	J247	J256-07	Analogue	J202 (0-5ms)	J189 (0-10ms)	J211 (0-20ms)
4001	Single Thermistor	✓	✓	✓	✓															
4002	Dual Thermistor	✓	✓	✓	✓															
4107	RHT + Flood										✓									
4108	RHT + Surface temp				✓															
4012	Thermistor + Door	✓	✓	✓	✓					✓										
4111	RHT (High Accuracy)												✓							
4114	RHT											✓								
4115	RHT	✓	✓	✓	✓							✓								
4116	RHT + T	✓	✓	✓	✓							✓								
4401	Single PT100					✓	✓													
4402	Dual PT100					✓	✓													
4410	PT100 + Door					✓	✓			✓										
4406	PT1000 + Door							✓		✓										
4512	CO ₂ + Thermistor	✓	✓	✓	✓									✓						
4805	Single Flood										✓									
4809	Dual 4-20mA													✓		✓				
4810	Single 0-5volt															✓	✓	✓	✓	
4901	Single T'couple (-200 to 200)								✓											
4902	Single T'couple (-200 to 200) + door								✓	✓										
4903	Single T'couple (-50 to +350)									✓										
4904	Single T'couple (-50 to +350) + door									✓	✓									

*Sold by the metre

**Supplied with instrument

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
 Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

Thermistor Probes

Y300	Part codes	Specifications
25mm Probe	Y300	Probe diameter 4mm
80mm probe	Y300-80	Probe operating range -40°C to +125°C
		Accuracy +/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
		Long term drift < 0.1°C per year
		Optional Extension Cables Y004 (1 metre) Y004-2 (2metre) Y004-3 (3 metre)
		Temperature Operating range -200°C to +250°C

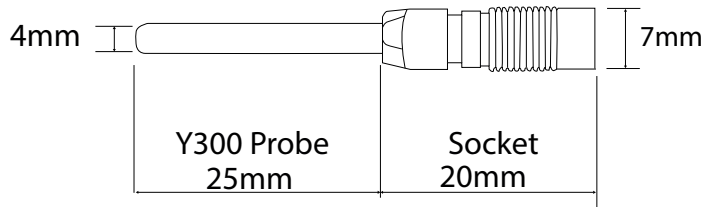

J095	Part codes	Specifications
Non-waterproof		Probe diameter 4mm
3 metre cable	J095-3-05	Probe operating range -40°C to +125°C
5 metre cable	J095-5-05	Accuracy +/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
Waterproof		Long term drift < 0.1°C per year
3 metre cable	J095-3-05-WP	IP rating IP68 (Waterproof version only)
5 metre cable	J095-5-05-WP	

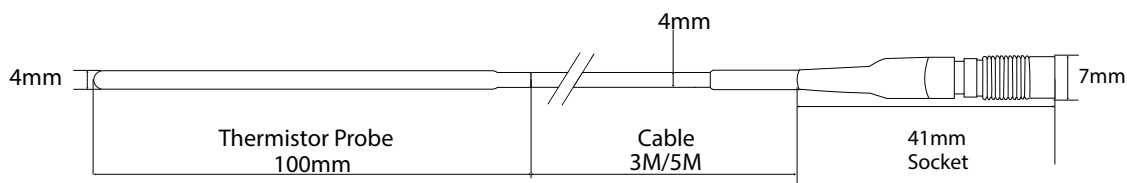

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com



ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81


(INTERCONTINENTAL SERVICES INC)

mail : sales@isi-be.eu web : www.isi-be.eu


Thermistor Probes cont'd

J254	Part codes	Specifications
Non-waterproof		Probe diameter 3mm
3 metre cable	J254-3-05	Probe operating range -40°C to +125°C
Waterproof		Accuracy +/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
3 metre cable	J254-3-05-WP	Long term drift < 0.1°C per year
		IP rating IP68 (Waterproof version only)

(Thin probe and cable for easy routing around fridge/freezer door seals)

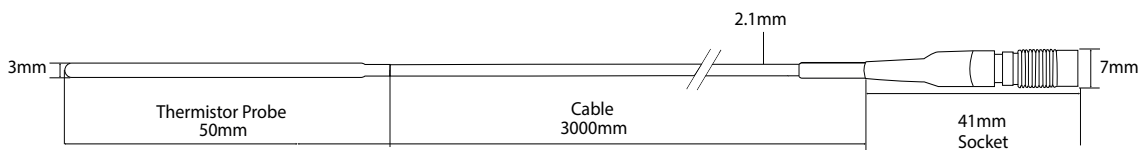

Y306	Part codes	Specifications
3 metre cable	Y306-3-05	Tag diameter 12mm
5 metre cable	Y306-5-05	Probe operating range 0°C to +125°C
		Accuracy +/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
		Long term drift < 0.1°C per year

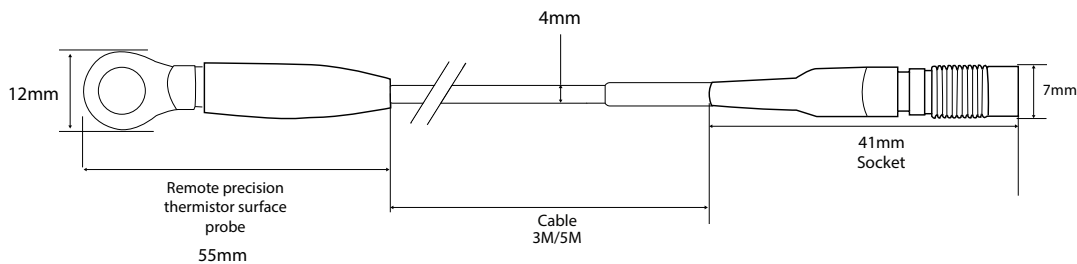

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

PT100 Probes

J094	Part codes	Specifications
Non-waterproof		Type Flat film
3 metre cable	J094-3-01	Probe diameter 4mm
5 metre cable	J094-5-01	Probe operating range -90°C to +250°C
Waterproof		Accuracy -50°C to +250°C +/- (0.15+0.002* t)°C
3 metre cable	J094-3-01-WP	Accuracy Below -50°C +/- (0.3+0.005* t)°C
5 metre cable	J094-5-01-WP	Long term drift +/- 0.1°C per year* *dependent on conditions of use
		IP Rating IP68 (Waterproof version only)

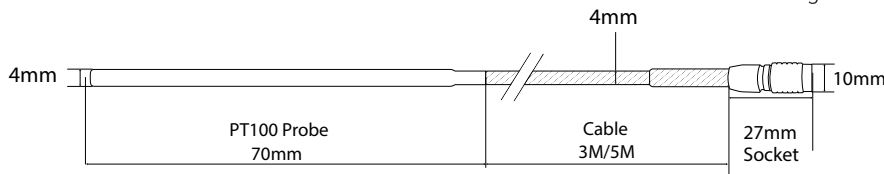

J237	Part codes	Specifications
Non-waterproof		Type Wire wound
3 metre cable	J237-3-01	Probe diameter 4mm
5 metre cable	J237-5-01	Probe operating range -200°C to +250°C
Waterproof		Accuracy -100°C to +250°C +/- (0.15+0.002* t)°C
3 metre cable	J237-3-01-WP	Accuracy Below -100°C +/- (0.3+0.005* t)°C
5 metre cable	J237-5-01-WP	Long term drift +/- 0.05°C per year* *dependent on conditions of use
		IP Rating IP68 (Waterproof version only)

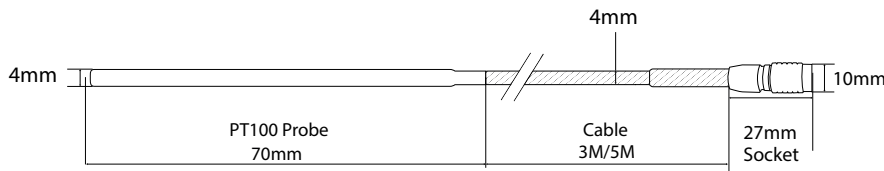

Extension cables (suitable for J094 and J237)	Part codes	Specifications
1 metre cable	Y509	Temperature Operating range -200°C to +250°C
3 metre cable	Y509-3	
5 metre cable	Y509-5	
10 metre cable	Y509-10	
15 metre cable	Y509-15	

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

J043/J044 Thermocouple Probes

Teflon Coated	Part codes	Specifications
3 metre cable	J043-3-09	Type
5 metre cable	J043-5-09	Ultra precision Teflon coated Type T (Thermocouple junction is isolated)
		Probe diameter
		3mm
		Probe operating range
		-200°C to +200°C
		Accuracy
		BS EN 60584 - 1:2013 Class 1 +/- 0.5°C or +/-0.4%, (whichever is greater) above -40°C
		Below -40°C +/-1 or 1.5% of reading
		Long term drift
		< 0.1°C per year

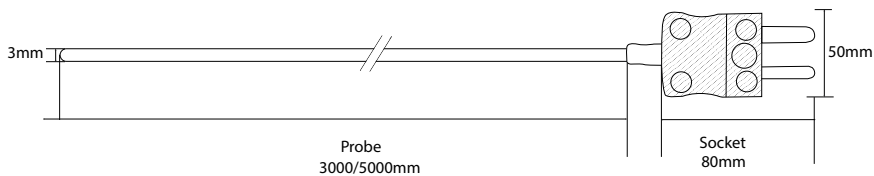

Mineral Insulated	Part codes	Specifications
3 metre cable	J044-3-09	Type
5 metre cable	J044-5-09	Mineral insulated Type T (Thermocouple junction is isolated)
		Probe diameter
		3mm
		Probe operating range
		-200°C to +350°C
		Accuracy
		BS EN 60584 - 1:2013 Class 1 +/- 0.5°C or +/-0.4%, (whichever is greater) above -40°C
		Below -40°C +/-1 or 1.5% of reading
		Long term drift
		< 0.1°C per year

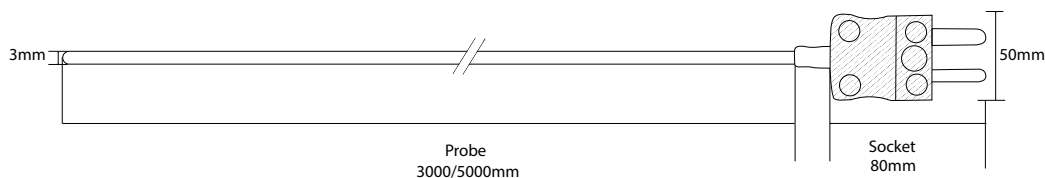

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

RH/T Probes

J140	Part codes	Specifications
	J140	

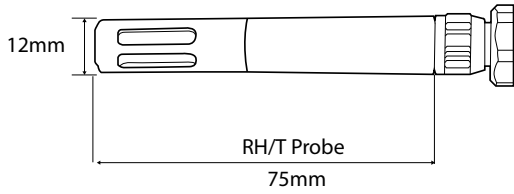


Temperature accuracy chart for J140 probe

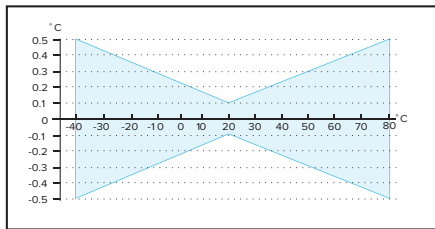


Humidity Probe details	
Recommended range	0-100% RH non condensing
Accuracy	+/- 2% (0-90%) +/- 3% (90-100%)
Temperature dependence	<(0.025+0.0003xRH)[%RH/°C]
Temperature Probe details	
Temperature operating range	-40°C to +80°C
Temperature accuracy	+/- 0.1°C at 20°C (see temp accuracy chart)
Long term drift	+/- 0.05 °C

J223	Part codes	Specifications
	J223	

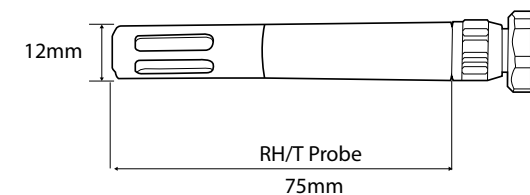

Temperature accuracy chart for J223 probe

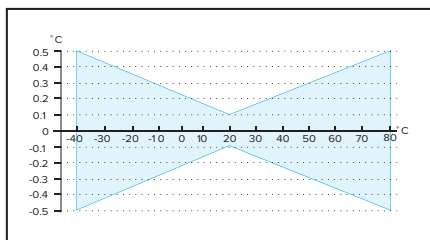

Humidity Probe details	
Recommended range	0-100% RH non condensing
Accuracy	+/- 2% (0-90%) +/- 3% (90-100%)
Temperature dependence	<(0.025+0.0003xRH)[%RH/°C]
Temperature Probe details	
Temperature operating range	-40°C to +80°C
Temperature accuracy	+/- 0.1°C at 20°C (see temp accuracy chart)
Long term drift	+/- 0.05 °C
* The J223 variant has an additional coating which substantially extends the lifetime and the measurement performance of the humidity sensor in corrosive environments. Additionally it improves the long term stability in dusty, dirty or oily applications by preventing stray impedances caused by deposits on the active sensor surface.	

Extension cables for J140/J223	Part codes	Specifications
1 metre cable	Y421-1	Temperature Operating range -25°C to +85°C
3 metre cable	Y421-3	
5 metre cable	Y421-5	

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com



ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

RH/T Probes cont'd


J115	Part codes	Specifications
	J115	
		Humidity Probe details Recommended range 0-100% RH non condensing Accuracy +/- 0.8%RH/ +/- 0.1°C at 10°C to +30°C Long term stability <1% per annum Temperature Probe details Temperature operating range -50°C to +100°C Temperature accuracy PT100 1/3 DIN Class B (see temp accuracy chart)

Extension cables	Part codes	Specifications
2 metre cable	Y527	Temperature Operating range -50°C to +100°C
5 metre	Y528	

Temperature window graph for J115 probe

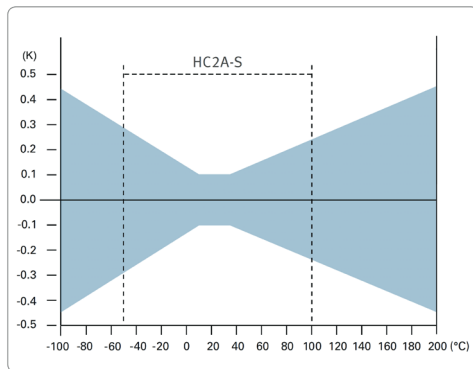

Humidity graph for J115 probe

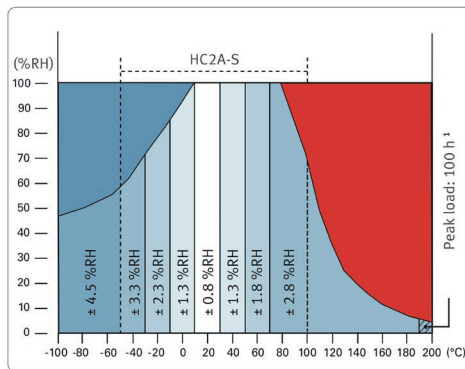

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
 Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)

mail : sales@isi-be.eu web : www.isi-be.eu

External CO₂ Sensor

J247	Part codes
(0-5% CO ₂)	J247-5-02
(0-10% CO ₂)	J247-10-02

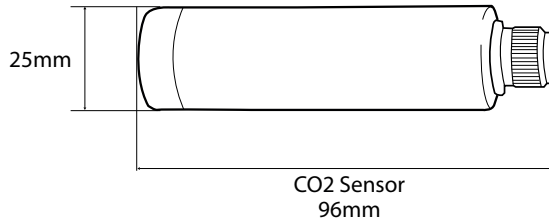


Specifications	
Operating Temperature of CO ₂ Measurement	-40°C to +60°C
Accuracy @ 25°C and 1013 PA	±0.1% CO ₂
Temperature Dependence with Compensation, 0 to 20%CO ₂ between -40°C and +60°C	±0.045% of reading/°C
Long term drift	+/- 0.3% CO ₂ per year
Housing	PET plastic
Cable	1.5 metre*
Output	0-5VDC

Recommended Installation: The probe can be installed in an environment with an operating temperature range -40 °C to +60 °C. Make sure the probe is in a location that represents the measurement environment properly.

*Spare cable available with part no. J247-CAB

CO₂ Concentration Sensor

J256-07	Part codes
	J256-07

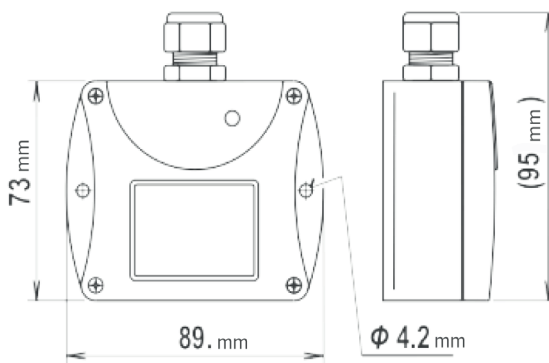

Specifications	
Operating Temperature of CO ₂ Measurement	-30°C to +60°C
Measuring range	0 to 2000ppm
Accuracy	±50ppm +2% of measured value
Temperature Dependence	-20°C to +45°C typ. 2ppm CO ₂ / °C
Analog output	4-20mA
IP Rating of housing	IP30
Cable	3 metre

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com



ISI sa-nv Instrumentation for Science and Industry
Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

Airflow Sensors

0-5M/S	Part codes	Specifications
	J202-07	
		Probe operating range 0-5m/s (0... 1000ft/min)
		Analogue Output 0-5V
		Working range temperature -20°C to +60°C
		Storage temperature -30°C to +60°C
		Working range 0-5m/s (0... 1000ft/min)
		Accuracy ±(0.2m/s / 40ft/ min +3% of measuring value)
		Cable length 2 metres
		Power Supply 12V via external universal power supply

0-10M/S	Part codes	Specifications
	J189-07	
		Probe operating range 0-10m/s (0...2000ft/min)
		Analogue Output 0-5V
		Working range temperature -20°C to +60°C
		Storage temperature -30°C to +60°C
		Working range 0-10m/s (0...2000ft/min)
		Accuracy ±(0.3m/s / 60ft/ min +4% of measuring value)
		Cable length 2 metres
		Power Supply 12V via external universal power supply

0-20M/S	Part codes	Specifications
	J211-07	
		Probe operating range 0-20m/s (0...4000ft/min)
		Analogue Output 0-5V
		Working range temperature -20°C to +60°C
		Storage temperature -30°C to +60°C
		Working range 0-20m/s (0...4000ft/min)
		Accuracy ±(0.4m/s / 80ft/min +6% of measuring value)
		Cable length 2 metres

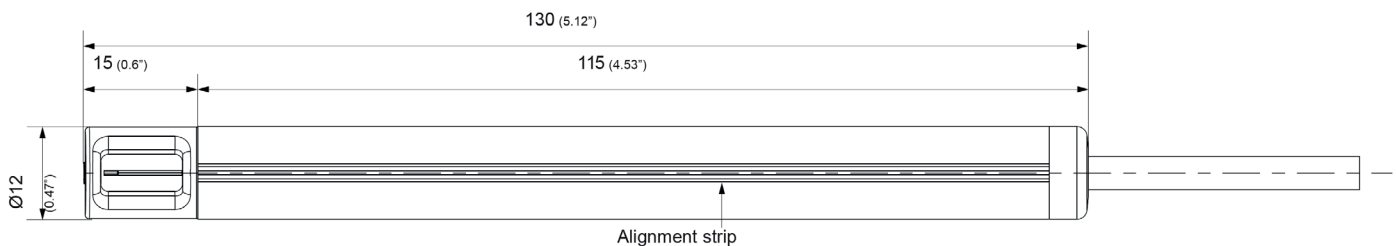

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
 Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)

mail : sales@isi-be.eu web : www.isi-be.eu


PT1000 Probes

J182	Part codes	Specifications
Non-waterproof		Probe diameter 4mm
3 metre cable	J182-3-01	Probe operating range -90°C to +110°C
5 metre cable	J182-5-01	Accuracy Class A = +/- (0.15+0.0020* t)°C
Waterproof		Long term drift +/- 0.05 °C per year
3 metre cable	J182-3-01-WP	IP Rating IP68 (Waterproof version only)
5 metre cable	J182-5-01-WP	

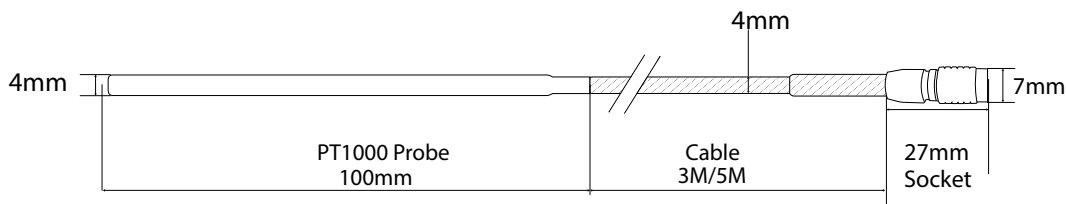

Door Sensors

DC001	Part codes	Specifications
3 metre cable	DC001	Cable length 3 metre cable

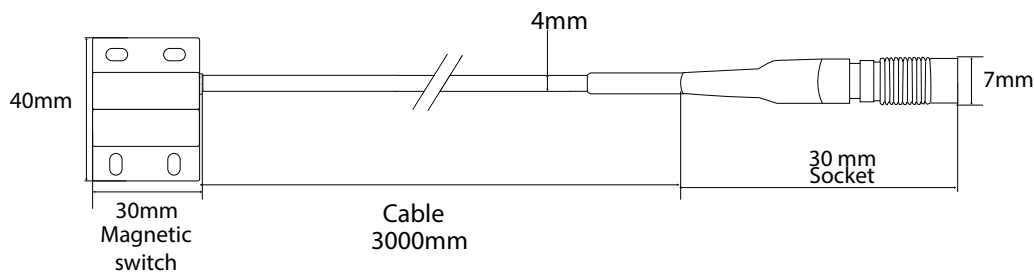

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com




ISI sa-nv Instrumentation for Science and Industry
 Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)


mail : sales@isi-be.eu web : www.isi-be.eu

Door Sensors cont'd

DC002 (Medium duty Door switch with Hirose)	Part codes	Specifications
	DC002	Cable length 3 metre cable

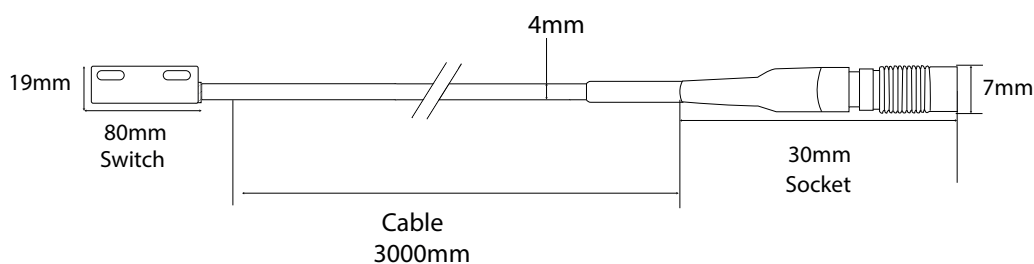

DC003 (Industrial Door events sensor)	Part codes	Specifications
	DC003	Cable length 3 metre cable

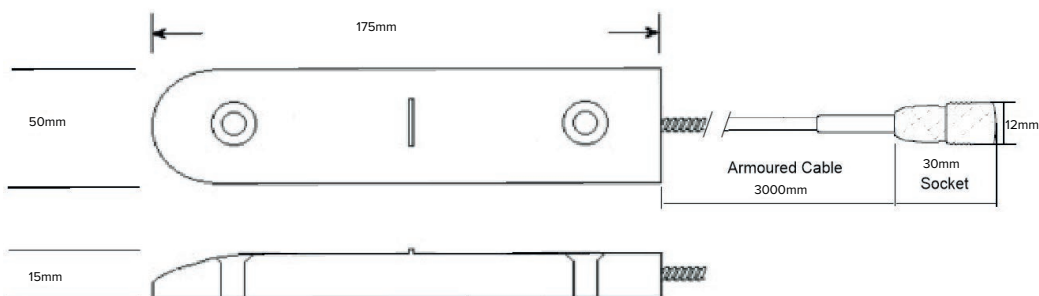

Manufactured by Hanwell | Ellab RoHS

Version 9 - EC26588

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice.

hanwell.com



ISI sa-nv Instrumentation for Science and Industry
 Rue du Doyenné 3 Dekenijstraat 1180 Brussels – Belgium - Tel 02/ 343 30 81

(INTERCONTINENTAL SERVICES INC)

mail : sales@isi-be.eu web : www.isi-be.eu